



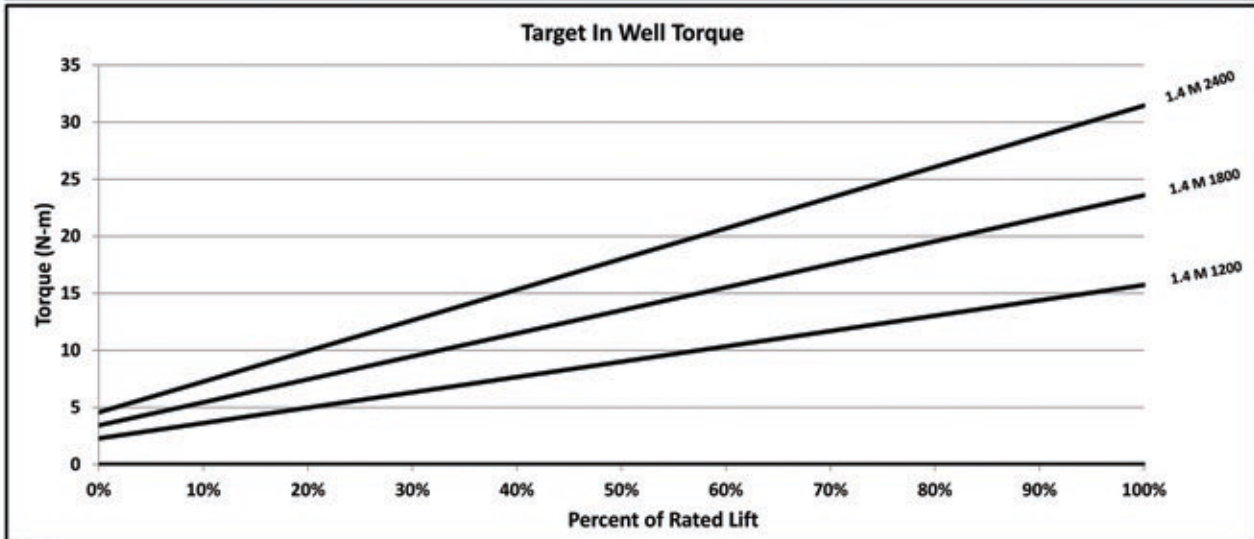

# 001.4 PUMP SPECIFICATION INSERT

001.4m <sup>3</sup> / Day / 100 RPM (8.8 bbl / Day / 100 RPM)				
Available Models		1.4 M 1200	1.4 M 1800	1.4 M 2400
	Pump Lift (m H <sub>2</sub> O)	1200	1800	2400
	Rated Pressure (Kpa)	12000	18000	24000
	Rated Torque (N-m)	21	32	43
ROTOR	Rotor Top Connection (mm)	15.90		
	Rotor Head Diameter (mm)	35.56		
	Overall Rotor Length (m)	1.703	2.303	2.903
	Min. Tubing Size	48.3 mm (1.90")		
STATOR	Stator OD (mm)	55.0		
	Collar OD (mm)	53.4		
	Discharge Connection	1.90" NU Box SC		
	Intake Connection	1.90" NU Box SC		
	Stator Overall Length w TB (m)	1.657	2.257	2.857
	Distance TB to Elastomer (mm)	300.0		
	TB bottom connection	1.90" EUE Pin		
	Notes: Standard production pump or 2 7/8" insert pump (Modified 35.56 mm 1.40" OD 5/8" coupling)			

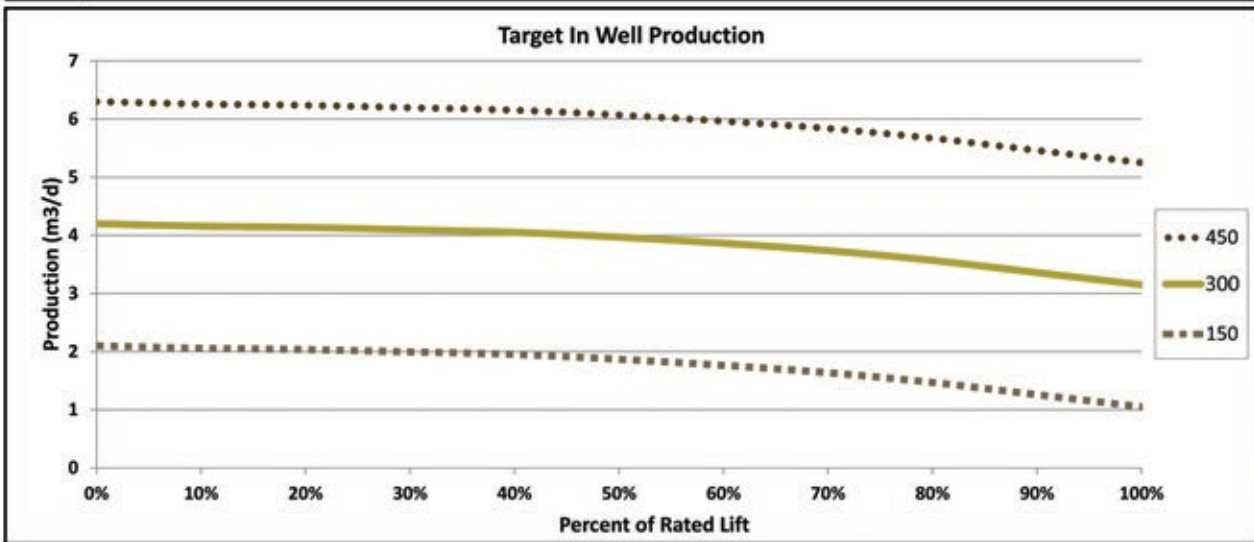

Sept. 26, 2018