





PUMP SPECIFICATION

006M - STD - FL - SH:IP



6 m ³ / Day / 100 RPM (38 bbl / Day / 100 RPM)					
Available Models	006 M 0600	006 M 1200	006 M 1800	006 M 2400	
Geometry: Single Lobe Operating Speed: 50 - 500 RPM Free Gas Volume Fraction: 40% continuous					
Swept Rotor Angle: 40 Intake cavity area - mm ² (in ²): 392 (0.61)					
Pump Lift H ₂ O - m (ft)	600 (1968)	1200 (3936)	1800 (5904)	2400 (7872)	
Rated Pressure kPa (psi)	6000 (870)	12000 (1740)	18000 (2611)	24000 (3481)	
Rated Torque N-m (ft-lbs)	46 (34)	91 (67)	137 (101)	183 (135)	
ROTOR	Rotor Top Connection mm (in) 3/4" API Pin				
	Rotor Head Diameter mm (in) 19.05 (0.75)				
	Overall Rotor Length m (in)	1.58 (62)	2.72 (107)	3.86 (152)	4.99 (196)
	Weight kg (lbs)	10 (22)	18 (40)	26 (57)	34 (75)
	Nominal Rotor Drift OD mm (in)	38.10 (1.500)			
STATOR - STD	Stator OD mm (in) 72.00 (2.833)				
	Collar OD (mm) 77.80 (3.06)				
	Connection Discharge - Intake 2 3/8" EUE Pin - 2 3/8" EUE Pin				
	Stator Overall Length w TB m (in)	1.59 (63)	2.73 (108)	3.87 (152)	5.01 (197)
	Weight kg (lbs)	19 (42)	38 (84)	56 (123)	75 (165)
	Distance TB to Elastomer mm (in)	300 (12)			
STATOR - FL - SH-IP	Tagbar/sub bottom connection 2 3/8" EUE Pin				
	Stator OD mm (in) FL - 72 (2.833) // SH-INSERT 68 (2.677)				
	Collar OD mm (in) FL - 72 (2.833) // SH-INSERT 68 (2.677)				
	Connection Discharge - Intake FL - 2 3/8" NUE Box // SH-INSERT - 2 3/8" NUE Box				
	Stator Overall Length w TB m (in)	1.59 (63)	2.73 (108)	3.87 (152)	5.01 (197)
	Weight kg (lbs)	19 (42)	38 (84)	56 (123)	75 (165)
NOTE	Distance TB to Elastomer mm (in) 300 (12)				
	Tagbar/sub bottom connection FL - 2 3/8" EUE Pin // SH-INSERT - 1.90" EUE Pin				
INSERT pump configuration for 3 1/2" tubing requires a 3/4" SH coupling (1.50" OD) for pick up.					

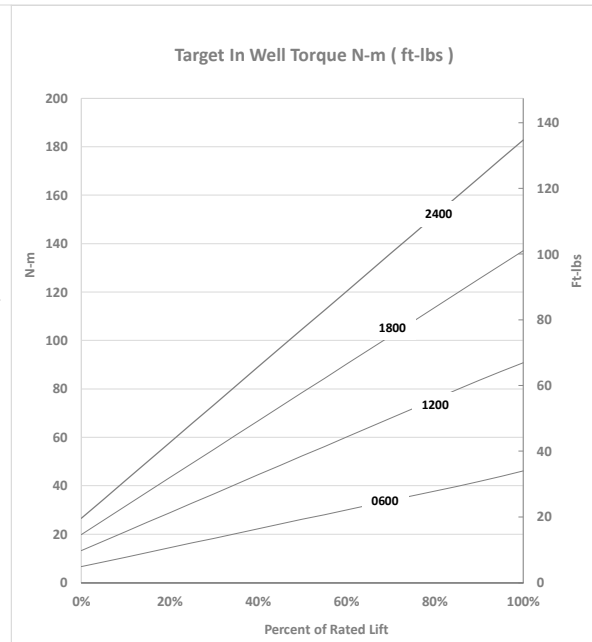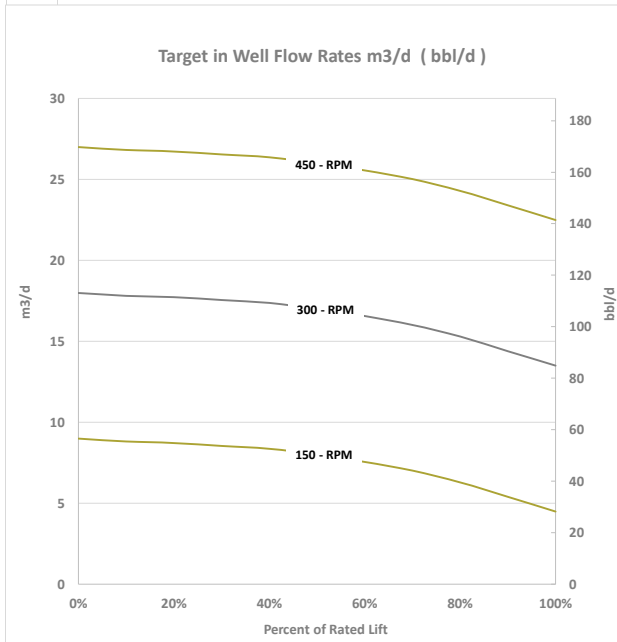

MANTL reserves the right to change information contained in this document without prior notice. Contact a MANTL representative for additional information.

5/15/2020

FROM THE GROUND UP