



MB-CB-075-10T

MB-CB-075-10T

RATING

Power rating, kW / HP	55 / 75
Maximum Polished Rod Speed (RPM)	500
Thrust Bearing rating, ISO (kN / lbs)	720 / 161,970
Thrust Bearing rating, Ca90 (kg / lbs)	19,080 / 41,977
Maximum input torque (Nm / ft-lbs)	2,035 / 1,500

STRUCTURAL

Belt guard	Fully enclosed hinged
Polished rod size in.	1 1/4" or 1 1/2"
Wellhead connection	3 1/8" 3,000 psi R-31 Flange
Wellhead connection	4 1/16" 3,000 psi R-37 Flange
Drivehead Shaft	3 1/2" shaft diameter
Maximum Driven Sheave (OD x Type x Groove)	31.5 x 5V x 6
Overall Height (mm / inches)	1346 / 53
Drivehead Weight (kg / lbs)	500 / 1100

BRAKING SYSTEM

Recoil control system Centrifugal wet brake


OPTIONAL EQUIPMENT

Environmental Seal Integral (5 seals)
 Environmental Seal Booth (open)
 Rope Packing Seal
 Leak Detection System
 Tachometer

MAINTENANCE

Mobil SHC-630 / Shell Morlina-B-220 / PetroCan
 SYNDURO SHB 150 (13 liters)

Frequency 6 - 12 months

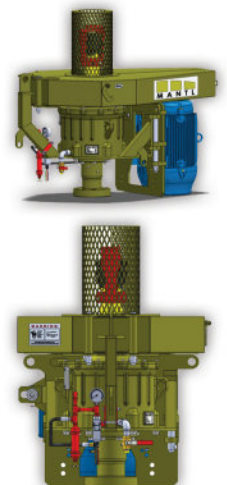

'CAUSE WE GIVE A S#!T